




TYPE SDG

DISTRIBUTION GRIP DEAD END, GALVANIZED STEEL

For Use On: Jacketed
Conductors

Conductor May be Right or Left
Hand Lay

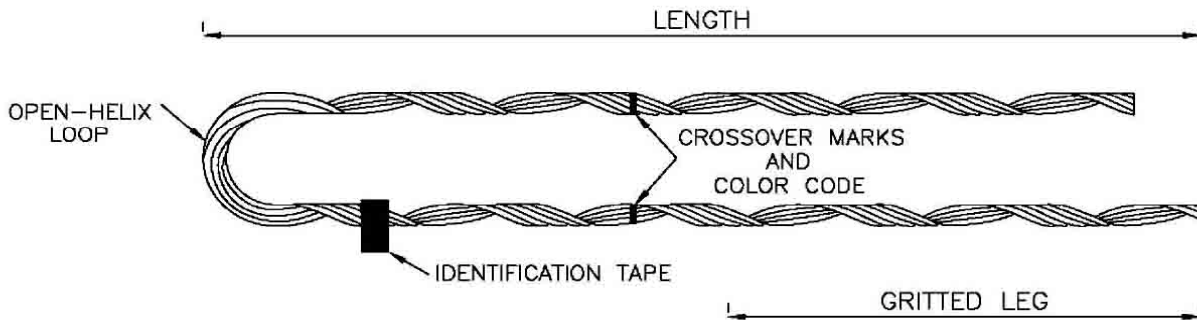

CATALOG NUMBER	Conductor Range		Nominal Conductor Size	Units/ctn	Length (mm)	Wt/carton (kg)	Color code
	(inches)	(mm)					
SDG0257	0.229 - 0.257	5.817 - 6.528	#6 7W 2/64s, #6 Solid 3/64s	100	457	9.07	Orange
SDG0289	0.258 - 0.289	6.553 - 7.341	#4 Solid 2/64s, #6 7W 3/64s	100	533	15.88	Yellow
SDG0325	0.290 - 0.325	7.366 - 8.255	#6 7W 4/64s, #4 7W 2/64s	100	660	18.15	Red
SDG0364	0.326 - 0.364	8.280 - 9.246	#4 7W 3/64s, #4 7W 4/64s	100	686	27.22	Green
SDG0409	0.365 - 0.409	9.271 - 10.389	#2 7W 3/64s, #4 7W 5/64s	100	686	27.22	Yellow
SDG0460	0.410 - 0.460	10.414 - 11.684	#2 7W 5/64s, #4 7W 4/64s	50	737	20.42	Blue
SDG0516	0.461 - 0.516	11.709 - 13.106	#1 19W 5/64s, 1/0 7W 4/64s	50	787	20.42	Orange
SDG0577	0.517 - 0.577	13.132 - 14.656	1/0 19W 5/64s, 1/0 19W 6/64s	50	914	29.49	Purple
SDG0653	0.578 - 0.653	14.681 - 16.586	3/0 7W 4/64s, 4/0 7W 4/64s	25	889	20.42	Blue
SDG0739	0.654 - 0.739	16.612 - 18.771	250 9W 4/64s, 266.8 19W 4/64s	25	965	27.22	Red
SDG0837	0.740 - 0.837	18.796 - 21.260	300 19W 5/64s, 336.4 19W 5/64s	10	1,016	18.15	Brown
SDG0947	0.838 - 0.947	21.285 - 24.054	336.4 19W 8/64s, 397.5 19W 6/64s	10	1,016	20.42	Green
SDG1071	0.948 - 1.071	24.079 - 27.203	477 37W 5/64s, 500 37W 8/64s	10	1,016	22.69	Black
SDG1212	1.072 - 1.212	27.229 - 30.785	350 19W 12/64s, 500 37W 12/64s	10	1016.0	31.76	Purple